

PL Systems, Inc. 10529 Olympic Drive, Ste. 102 Dallas, TX 75220


Distance at Center / Foot-candles at Center Direct Beam Only. No Reflected Light

6'	10'	20'	30'	40'	
69	25	6	3	1	

LIGHT PATTERN ON FLOOR AND VERICAL ON WALL SURFACE SIZES = 20' X 10'. DISTANCE =7' TO WALL **GRID IS ON 1' CENTERS** 

Fixture model	# lamps	attenuator
MJ155-T-FUL-120	2	BARE

Zonal Output					
Half Angle %	Output				
0-15 dgr. 0-30 dgr. 0-45 dgr. 0-90 dgr.	15 29 82 100	Half Angle Solid Angle			
Solid Angle	degrees				
Beam angle across	n/a	A QT			
Beam angle along	n/a	across			
Field angle across	n/a				
Field angle along	n/a	—along —			

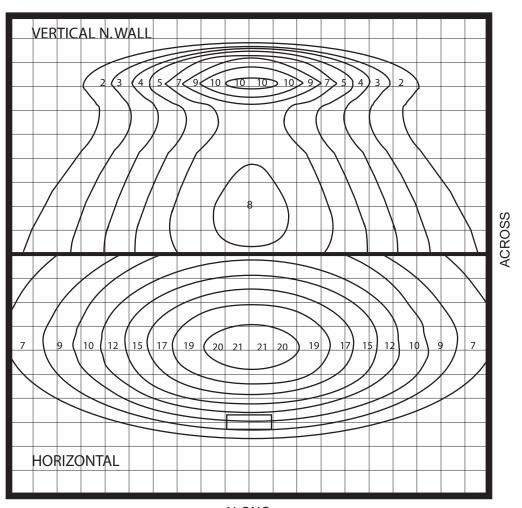

**ALONG**