
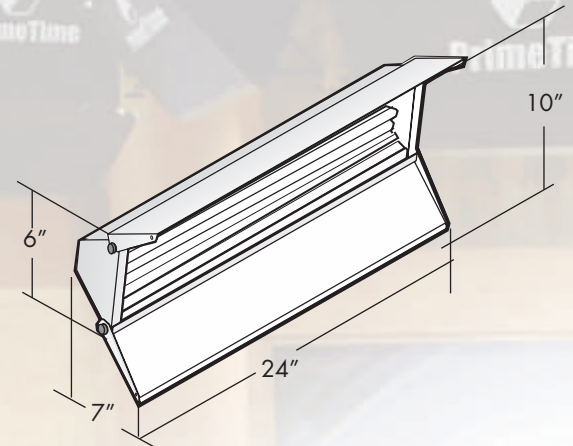


## REAL SOLUTIONS TO LOCATION LIGHTING

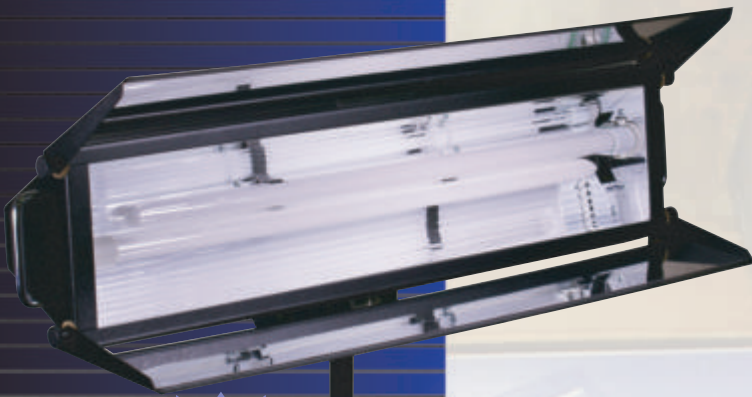

### Why PrimeTime Technology?

**More light, not heat.**  
Stop melting the talent.

**Spectacular images - every day**

Daylight or Tungsten balance.  
12,000 lamp hours.  
Folding reflective wings to enhance light control and protect lamps during transport.

**Lower operational cost**

Reduced - lamp inventory.  
              - lamp maintenance.  
Lower - power consumption.

**No new power**

Plug into any standard,  
3-prong 120V outlet.

**Total control**

Line voltage or analog  
dimming available.

**No flicker.**

**No noise.**



**Location soft light,  
dual lamp, portable.**

#### Power Control

FUL Standard	100%
Non dimming	
DIM Line Voltage	0-100%
Power line voltage controls intensity (2 wire dimming)	
DAN Analog	2-100%
Separate 0-10V Circuit controls intensity	

#### Available Accessories



Black Fabric Eggcrate



Location Kit



214.393.5998  
FAX:214.393.5999  
www.kw2.com

 **PrimeTime**  
Lighting Systems®

Manufactured by PL Systems, Inc.  
10529 Olympic Drive, Suite #102  
Dallas, Texas 75220

# REAL SOLUTIONS TO LOCATION LIGHTING

# LSL255

& LOCATION KIT

## Specifications

Weight	6lbs., welded aluminum, Global directional adjustment
Sound rating	> Class A
Start temperature	50 degrees F
Lamp type	Dulux L triphosphor
Lamp frequency	25,000 Hz
Power factor	>0.95
Total harmonic distortion	<10%
Transient protection	EMI Filter FCC Part 18C Class A IEEE 587A (ANSI C62.41)
Power consumption	1.1 Amps@120V, 60Hz (110 Watts)
Peak candlepower	4,000 candelas
Typical lamp output	2 @ 4,800 = 9,600 Lumens
Daisy Chainable	

## Accessory List

LDIM-425W-1943	Voltage in-line dimmer
LDAN-1-W-1943	Analog in-line dimmer
FEG-1924	Black fabric eggcrate
SOC-1925	Soft-Lens sock
LSL Location Kit	(3) LSL255 fixtures with stands, heads, spuds and case

All fixtures furnished with 10ft power cord.



## Ordering Chart

### 55/830

### Studio Lamps, 55W Twin

Catalog ID	Color Temp	CRI	Light output
55/830	3000K	82%	4800L
55/832*	3200K	85%	4000L
55/856*	5600K	85%	4000L
55/930	3000K	98%	3000L
55/954	5000K	98%	3000L
80/830	3000K	82%	6000L

(Two lamps included with each fixture)

\* Small upcharge for 832 and 856 lamps

## Foot-Candles At Center

	260	160	140	110	49
LSL255 Bare	260	160	140	110	49
LSL255 w/Eggcrate	215	135	88	70	33
LSL255 w/Soft-Lens sock	125	80	53	36	16
Distance	3'	4'	5'	6'	9'

## LSL255

## C

## FUL

## 120

### Fixture Model

LSL255

### Color

C Black Housing  
T White Housing  
Other colors -  
Contact factory

### Dimming Options

FUL - Full power ballast  
DIM - Line voltage dimming  
DAN - 0-10V analog dimming  
All Fixtures furnished with 10ft power cord  
DAN furnished with 10ft BNC cable

### Voltage & Cord Set

120: 120V, 5-15P (3 prong, 'Edison' cord set) Standard

## Available Models

1SL255  
1SL280

MSL255  
MSL280

MSL155  
MSL180

MSL7

Fill Lights

Portable  
Video

Conference



214.393.5998  
FAX:214.393.5999  
www.kw2.com

 **PrimeTime**  
Lighting Systems®

Manufactured by PL Systems, Inc.  
10529 Olympic Drive, Suite #102  
Dallas, Texas 75220